

Logitank Blue LTBL 26



Specifications




Description	
Diesel Safe Fill, litres	21,500
AdBlue®, DEF Safe Fill, litres	4,300
Length, mm	6,058
Width, mm	2,438
Height, mm	2,896
Vent Pipe	Standard
Fluid Level Dipstick	Standard
Compliance	AS1940, AS1692, UL142, HSNOCOP 24



A self-bundled tank for the safe storage and handling of both diesel and AdBlue®, AUS32 or other DEF products from the one unit.

Ideal for refuelling commercial vehicles that use AdBlue®, AUS32 or DEF.

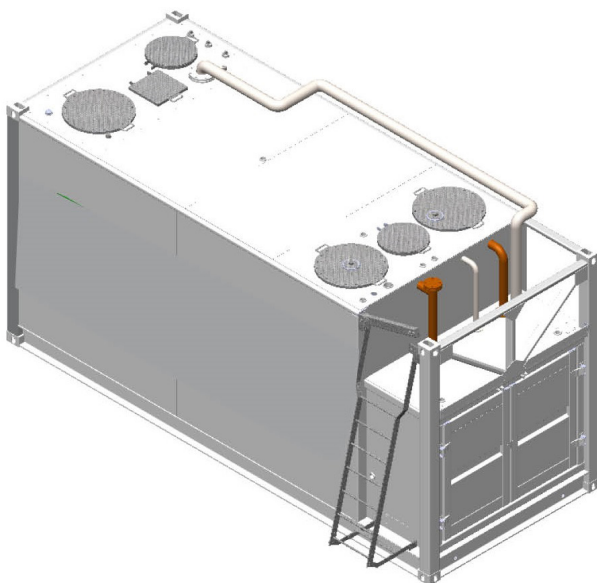

- Self-bundled dual compartment design
- Bundled pump bay with lockable weatherproof doors
- Fill and dispense points in the main lockable pump bay
- Galvanised access ladder and platform
- Corner container lock castings for ease of transport
- Access manways
- Warranty – 5 years structural, 1 year on valves; conditions apply

Diesel tank standard with:

- Fluid level dipsticks for tank and interstitial space
- Vent pipe for diesel tank and interstitial space
- Suction foot valve, overfill protection and electronic overfill alarm

DEF tank standard with:

- Chemical resistant vented tank
- Insulated tank and dispensing line for temperature control
- Stainless steel pipework
- Fluid level dipsticks for tank and interstitial space